

FaxFinder™

V.34 Fax Server



Benefits

- Sends, receives and routes faxes to/from the desktop
- Distributed fax solution for remote offices and field sales people
- Secure, convenient faxing for LAN users
- Completes unified messaging solutions


The FaxFinder is a complete, easy-to-use network fax server. Using Direct Inward Dialing (DID), it allows you to receive faxes wherever you are as e-mails and send faxes from any application that can print. The FaxFinder provides distributed faxing capabilities, over a WAN, from a corporate office to small remote offices as well as to field sales people. In addition, it provides secure, convenient faxing for LAN users offering a high degree of privacy for both the sender and recipient.

Features

- One Direct Inward Dial (DID) port for inbound faxing and one loop-start inbound/outbound fax port
- Faxes routed via DID numbers to e-mail
- Faxes converted to TIFF files
- DID port supports wink-start, immediate-start and delay dial service types
- Built-in TIFF viewer shows thumbnails, zooms, rotates and flips
- Includes a send fax client compatible with Windows XP, 2000 and NT
- Build one fax of multiple documents from multiple applications
- Schedule faxes to be sent at a later time
- Faxes are routed to first available FaxFinder
- Super G3 V.34/33.6K fax communication
- MH, MR and MMR compression
- Error Correction Mode (ECM) provides fast and reliable fax transmissions
- Web server interface for system configuration and management
- E-mail informs user of failed transmission
- Connects to 10/100BaseT Ethernet
- Two-year warranty

*V.34 Fax Server with
DID and IP
Capabilities*

Highlights

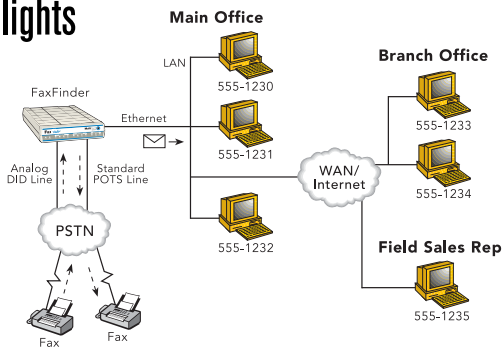

Faxes Routed Directly to the Desktop. To route faxes directly to the desktop, simply plug the FaxFinder into your LAN, hook up a DID trunk, and assign your user's e-mail addresses to the DID numbers. The FaxFinder automatically receives a fax through a DID line, converts it to a TIFF file and delivers the fax to the user over a LAN or WAN. Once received, users can view the fax, print the fax, forward it as an e-mail to another e-mail user, or re-fax it out.

Direct Inward Dial (DID). The FaxFinder's routing capability is a function of DID which allows multiple phone numbers to be placed on a single phone line. Every network user is assigned an individual fax phone number. The last 3 or 4 digits of that number correspond to the individual's fax extension. Senders simply dial the individual's fax telephone number (no special procedures are required) and the FaxFinder ensures the fax is delivered directly to their e-mail box.

Fax Security. With the FaxFinder, a small business can afford to provide the CEO, President, CFO, COO, Human Resources and others with virtual private fax lines. Because faxes are delivered directly to the user's e-mail box, the FaxFinder offers a high degree of security for both the sender and the recipient.

Fax Completes Unified Messaging. Some PBX solutions deliver voice mail to a user's e-mail box. Many, however, don't offer a fax solution. The FaxFinder fills this gap and completes the unified messaging solution by delivering faxes to one inbox.

Sending Faxes. The FaxFinder software allows the user to compose a fax from any application that utilizes a printer. To send, the user simply "prints" the document to the FaxFinder software, selects a cover page (or create their own) and enters a destination telephone number for the fax. The user can build one fax of multiple documents from multiple applications, as well as schedule faxes to be sent at a later time.

Specifications

Fax

Standards: V.34, V.17, V.29, V.27ter, V.21, T.30, T.30 Annex A, T.30 Annex F

Rates: 33.6K, 31.2K, 28.8K, 26.4K, 24K, 21.6K, 19.2K, 16.8K, 14.4K, 12K, 9600, 7200, 4800, 2400, 300 bps

Error Correction: ECM

Compression: MH (T.4), MR (T.4), & MMR (T.6)

Service Types: Wink-start; immediate-start; delay dial

Signaling Types: DTMF (1-7 digits accepted)

Connectors

RJ-11 line jack

RJ-12 DID line jack

RJ-45 Ethernet connection (10/100 BaseT)

Physical Description

4.25" w x 1.15" h x 5.8" d; 1.75 lb.

(10.8 cm x 2.9 cm x 14.8 cm; .8 Kg)

Power Consumption

Typical: 5.5 W (1.10 A @ 5v DC)

Maximum: 6.0 W (1.20 A @ 5.25v DC)

Power Supply

100-250VAC; 50/60 Hz universal input

Operating Environment

32° - 120° F (0° - 50° C); relative humidity 20-90% noncondensing

Approvals

EMC: EN55022, EN55024, FCC Part 15 Class B

Safety: UL60950, EN60950

Telecom: FCC Part 68, CS03

Ordering Information

Product	Description	Region
FF110	2-Port V.34 Fax Server	US/Canada

Made in Mounds View, MN, U.S.A.

Trademarks: FaxFinder, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / All other products and technologies are the trademarks or registered trademarks of their respective holders.

Enhanced Fax Features. The FaxFinder utilizes Super G3 V.34 fax speeds of 33.6K bps, more than double the speed of V.17/14.4K bps fax. Support for error correction mode (ECM) ensures error free faxing.

Web Server Interface for Configuration and Management. FaxFinder's web server interface provides for easy set-up and configuration. In addition, it provides the ability to view the current status of fax lines as well as a history of past fax activity. E-mails inform the user of a failed transmission.

World Headquarters
Tel: (763) 785-3500
(800) 328-9717

www.multitech.com

Multi-Tech Systems (France)
Tel: +(33) 1 64 61 09 81

Multi-Tech Systems (UK)
Tel: +(44) 118-959 7774